


## HONDA ST1300 WINDSHIELD (NON-ABS) MOUNTING INSTRUCTIONS

### 1) Remove the Honda Windshield

- a) Loosen and remove the four Phillips slot screws in the front black plastic covers. Remove the front and rear plastic covers. The rear plastic covers will not be re-installed.
- b) Loosen and remove the four windshield mounting screws, bushings and plastic washers with an 8mm wrench.
- c) The windshield brackets should be in the lower position. If they are in the upper position, loosen the four bracket nuts with a 10mm wrench, slide the two brackets to the lower position and retighten the nuts.

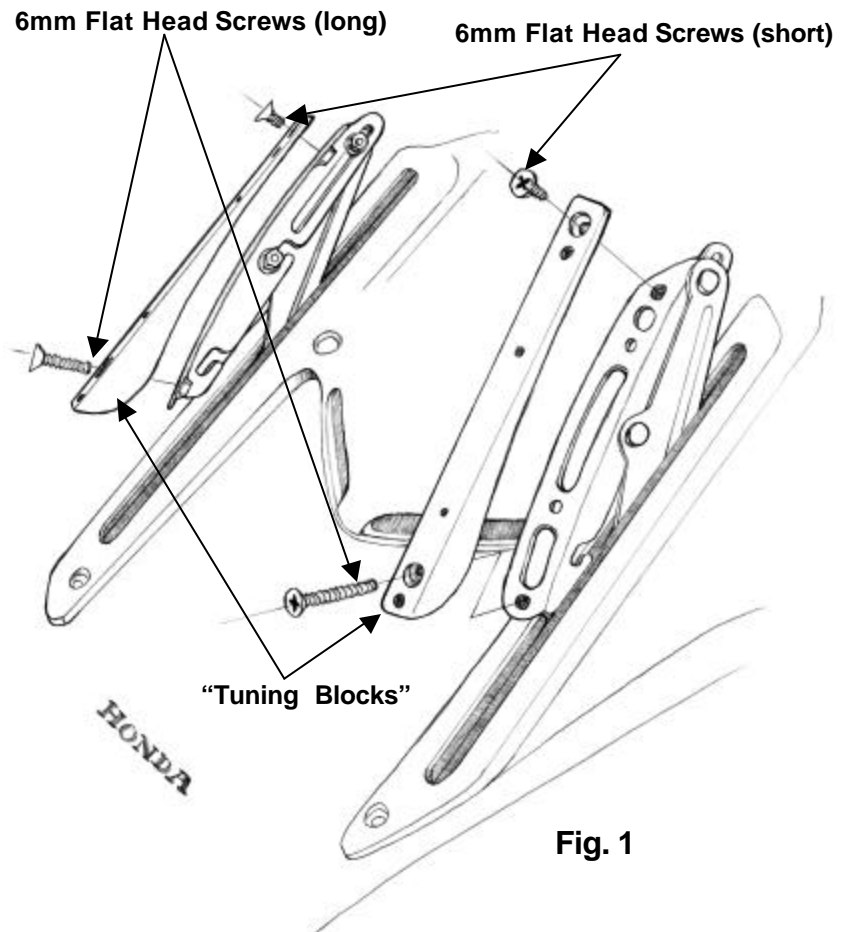

### 2) Mount the RIFLE Windshield

- a) Mount the Rifle "Tuning Blocks", with the thin ends at the top, to the windshield brackets. Use the 6mm flat head screws provided (two short and two long). **See Figure 1.**
- b) Mount the Rifle windshield to the "Tuning Blocks" with the Honda screws, bushings and plastic washers.
- c) Replace the outer black plastic covers with the four Phillips slot 4mm screws provided.